

WE MAKE SOLAR ENERGY MORE EFFICIENT AND SIMPLE!

EverExceed[®]
power your applications

ESM-50M

PERC MONO SOLAR MODULE



High module conversion efficiency, through superior manufacturing technology




Easy installation and handling for various applications



Entire module certified to withstand high wind loads (2400 Pa) and snow loads (5400 Pa)



ISO9001, OHSAS18001, ISO14001

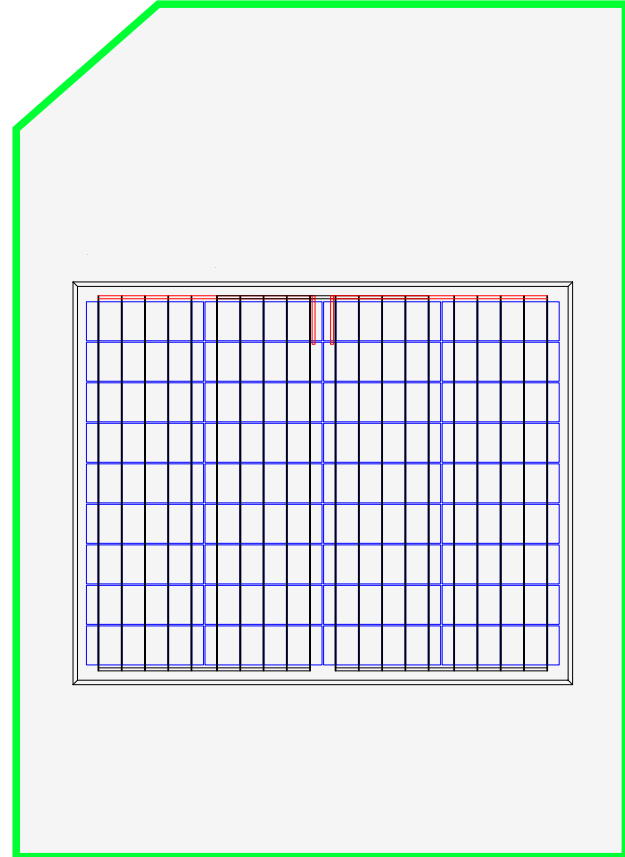

An EverExceed high-power residential solar module is an aesthetic addition to most roofs

ENGINEERING EXCELLENCE

The perfect combination of high performance and design

ADVANCED AESTHETICS

Has an elegant appearance that blends beautifully with your home roof line

DURABLE

Provides long life and enhanced cell performance

HIGH PERFORMANCE

Uses advanced surface texturing to improve efficiency



EverExceed PV modules offer BTS-leading performance for a variety of applications

Power your application

When you choose EverExceed, you get more well-engineered products, you also get our proven reliability, outstanding customer service and the assurance of our 25-year limited warranty

50 Watt

Electrical Characteristics

Type of Cell	Monocrystalline silicon
Cell Size(mm)	182*36.4*mm
Module Efficiency	16.66%
Cell Configuration	36(4x9)
Size of module (mm)	385x780x25mm
Weight per piece (Kg)	4Kg
Maximum power (Wp)	50W
Maximum power voltage (V)	20.5V
Maximum power current (A)	2.44A
Open circuit voltage (V)	24.5V
Short circuit current (A)	2.62A
Tolerance of Pmax	0~+5W

Standard Operating Conditions

Maximum system voltage (V)	1500V
Temperature coefficients of Isc (%)	0.046%/°C
Temperature coefficients of Voc (%)	-0.275%/°C
Temperature coefficients of Pm (%)	-0.35%/°C
NOCT (°C)	45°C±2°C
Temperature range	-40°C to +85°C
Surface maximum load capacity	60m/s (200kg/sq.m)
Series fuse rating	10A

Other Characteristics

Junction box type	IP65 rated
Connectors and cables type	1.5mm ²
Length of cables (mm)	350mm
Frame (material, corners, etc.)	Anodized aluminum alloy
Glass	High transmissivity low-iron 3.2 mm toughened glass
FF (%)	≥ 77.92%

QUALIFICATIONS

IEC	IEC 61215 IEC 61730 RoHS
CE EMC ISO	






10 years material and workmanship guarantee

95% power output guarantee for 5 years
90% power output guarantee for 10 years
80% power output guarantee for 25 years


EverExceed will not accept responsibility for damage caused to other equipment

Contact EverExceed to receive our latest product information



*We reserve the right of modifying specification and appearance

Characteristics (Module I-V Graph 50W)

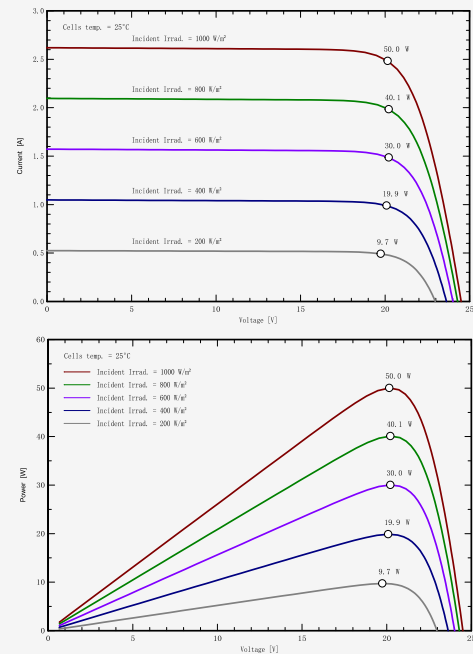

STC: Irradiance 1000W/m², Module temperature 25°C, AM1.5 spectrum.

Dimension

